

Pro-Line Rotary Phase Converters

PL-80

Quick Specs

See back for complete specs

Single Phase Input Voltage: 208 - 245 Volts

3 Phase Rated Output: 208 - 245 Volts

Minimum Single Phase Circuit: 170 Amps

Best Performance Single Motor Start: 40HP

Recommended 3 Phase Sizing: 100 Amps

Voltage Balance: +/-2-5% (Based on input)

Professional. Rugged. Affordable. Pro-Line offers more than a traditional phase converter. Built complete and loaded with features.

Control Panel Features


- Integrated Motor Starter with Start/Stop Push Button Switch
- Digitally Controlled & Protected Start Circuit
- Complete Phase Power Failure Protection
- CNC Voltage Balancing
- Power "ON" Indicator Light
- Easy Power Distribution Block Connections
- 10 Year Parts / Lifetime Labor Warranty
- Made In the USA

Idler Generator Features

- Custom Design Rotary Phase Converter Generators
- Low Impedance/High Efficiency Design
- Custom Copper Windings and Rotor
- Made by ABB / Baldor Electric USA
- Available in ODP and TEFC
- Soft Start Idler Generator
- Shielded Windings
- Made In the USA



Typical Wiring Diagram

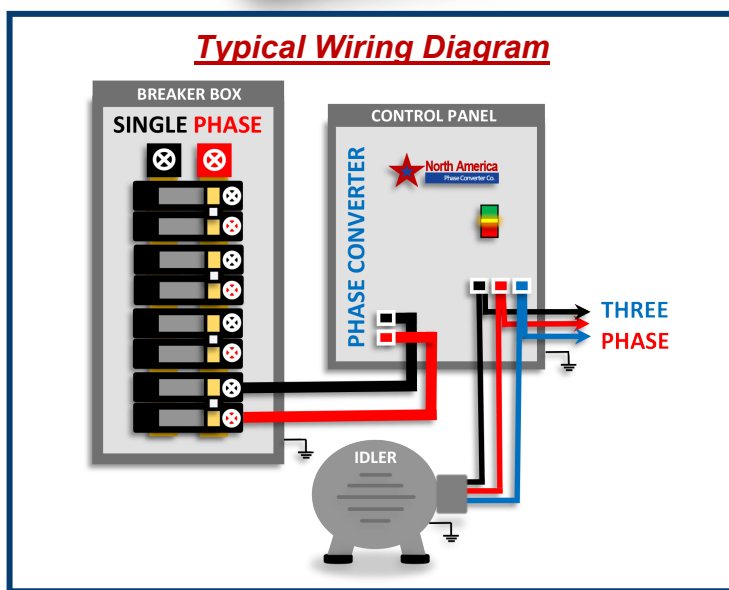

North America Phase Converter Co.
2728 South 163rd Street
New Berlin, WI 53151
877-545-2926
NorthAmericaPhaseConverters.com



Model	
Brand	NAPCES
Line	Pro-Line
Model #	PL-80
General Specifications	
Horse Power (HP)	80
Kilo-watt (kW)	60kW
Frequency (Hz)	60
Generator Type	ODP
Enclosure Type	NEMA 1 (Indoor)
Generator Frame	Twin 324
Single Phase Electrical Specifications	
Voltage Input	208-245
Minimum Fuse Size	170
Minimum Circuit Breaker Size	170
Maximum Fuse Size	350
Maximum Circuit Breaker Size	350
Minimum Wire Input	300 MCM
Idle Amperage	32.4
Three Phase Electrical Specifications	
Voltage Output	208-245 based on input voltage
Output Amperage	200
Voltage Balance	2 - 5%
Minimum Wire to Generator	1 AWG to each idler (pre wired)
Minimum Wire to Load	3/0 AWG or based on load
Dimensions & Weights	
Enclosure (H X W X D)	30" X 24" X 32"
Idler (Approx.) Length X Diameter	(2) 22" X 13.5"
Approx. Total Shipping Weight	856 lbs.

The PL-60 Pro-Line Phase Converter is best sized for:
Easy / Light Motor Loads - up to 60HP
<i>Examples of Easy Loads: Table Saw, Milling Machine, Drill Press</i>
Medium Motor Loads - up to 50HP
<i>Examples of Medium Loads: Belt Sander, Grinder, Mixer</i>
Hard Motor Loads - up to 40HP
<i>Examples of Hard Loads: Gearhead Lathe, Dust Collector, Fan</i>
Very Hard Motor Load - up to 30HP
<i>Examples of Very Hard Motor Loads: Air Compressor, Sub. Pump</i>
CNC, Resistive and Inductive Loads - up to 100 Amps @240 volts

Sizing Notes

PL-80

- For light/easy motor loads:** Size rotary phase converter up one size above motor size
- For medium motor loads:** Size rotary phase converter 1.5 times larger than motor size
- For heavy/hard motor loads:** Size rotary phase converter double the size of motor load
- For very hard motor loads:** Size rotary phase converter 2.5 times larger than the motor load
- For CNC, resistive and inductive loads:** Size rotary phase converter double the size of load

Available Accessories



Wired and Wireless Remote Switches



Twist-Lock Outlets and Plugs



Rubber Isolation Mounting Feet