

Pro-Line UL Rotary Phase Converters UL-3

Quick Specs

See back for complete specs

Single Phase Input Power - 208 - 245 Volts

Input Amperage Range - 10 - 20 Amps

Idler HP Rating - 3HP (2.2kW)

3 Phase Rated Output - 208 - 245 Volts

3 Phase Output Amperage - 9 Amps

Voltage Balance - Based on input +/-5-8%

Professional. Rugged. Affordable. UL. The Pro-Line UL offers much more than you would expect from a phase converter. Loaded with features and unmatched quality.

Control Panel Features

- UL-Listed Industrial Control Panel for the US and Canada
- Built-In Motor Starter with Start/ Stop Push Button Switch
- Digitally Controlled & Protected Start Circuit
- Complete Phase Power Failure Protection
- Precision Voltage Balancing
- Power "ON" Indicator Light
- 10 Year Parts / Lifetime Labor Warranty
- Made In the USA



Idler Generator Features

- UL Recognized Component
- Custom Made Rotary Phase Converter Generators
- Made by Baldor Electric USA
- Low Impedance/High Efficiency Design
- Available in ODP and TEFC
- Shielded Windings
- Made In the USA

Easy Installation



Installation made easy with removable back plate, open side walls, oversized wire connections and laser cut knockouts including one for a twist-lock outlet.



North America Phase Converter Co.
2728 South 163rd Street
New Berlin, WI 53151
877-545-2926
NorthAmericaPhaseConverters.com



Model	
Brand	NAPCES
Line	Pro-Line UL
Model #	UL-3
General Specifications	
Horse Power (HP)	3
Kilo-watt (kW)	2.2
Frequency (Hz)	60
Generator Type	ODP
Enclosure Type	NEMA 1 (Indoor)
Generator Frame	145
Single Phase Electrical Specifications	
Voltage Input	208-245
Minimum Fuse Size	10
Minimum Circuit Breaker Size	10
Maximum Fuse Size	20
Maximum Circuit Breaker Size	20
Minimum Wire Input	10 AWG
Idle Amperage	1.12
Three Phase Electrical Specifications	
Voltage Output	208-245 based on input voltage
Output Amperage	9
Voltage Balance	5 - 8%
Minimum Wire to Generator	12 AWG
Minimum Wire to Load	12 AWG or based on load
Dimensions & Weights	
Enclosure (H X W X D)	17" X 12" X 8"
Idler (Approx.) Length X Diameter	10" X 6.5"
Approx. Total Shipping Weight	87lbs.


The UL-3 Pro-Line UL Phase Converter is best sized for:	
Easy / Light Motor Loads - up to 2.5HP	
<i>Examples of Easy Loads: Table Saw, Milling Machine, Drill Press</i>	
Medium Motor Loads - up to 2HP	
<i>Examples of Medium Loads: Belt Sander, Grinder, Mixer</i>	
Hard Motor Loads - up to 1.5HP	
<i>Examples of Hard Loads: Gearhead Lathe, Dust Collector, Fan</i>	
Very Hard Motor Load - up to 1HP	
<i>Examples of Very Hard Motor Loads: Air Compressor, Sub. Pump</i>	
CNC, Resistive and Inductive Loads - N/A	

Sizing Notes UL-3

- For light/easy motor loads:** Size rotary phase converter up one size above motor size
- For medium motor loads:** Size rotary phase converter 1.5 times larger than motor size
- For heavy/hard motor loads:** Size rotary phase converter double the size of motor load
- For very hard motor loads:** Size rotary phase converter 2.5 times larger than the motor load
- For CNC, resistive and inductive loads:** Size rotary phase converter double the size of load



Built-In Motor Starter with Start / Stop Switch

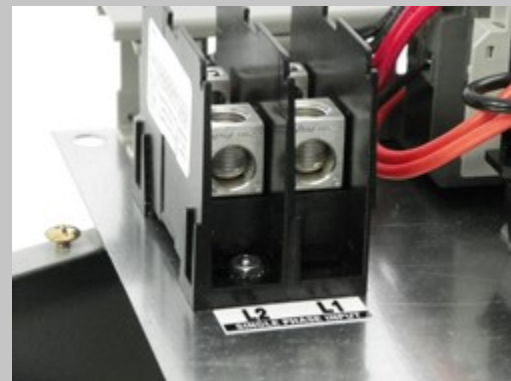

Oversized Power Distribution Blocks for Easy Installation



Complete 3 Phase Power Guard Protection