

TritonPro Maxx 18e Digital Phase Converter

5 HP / 18 Amps



TPX-18e Quick Specs

Horsepower: 5 HP

Max Input Amperage: 31 A

Max Output Amperage: 18 A

Primary Volts: 187 – 260 Volts

Secondary Volts: Same as input +/-2%

NAPCco Part #: TPX-18e



Technical Specifications

Specification	Details
Primary Voltage	187–260V
Secondary Voltage	Same as input +/- 2%
Frequency	60Hz
Operating Temp Range	-10°C (14°F) to 50°C (122°F)
Efficiency	98.7%
Standby Power	68W
Output Power	7.5 kVA
General Purpose	Single-Phase to 3-Phase
Certifications	ETL-Listed
Terminations	Terminal Blocks


TPX Features

- Advanced Solid-State Switching Technology
- Voltage Balancing within 2%
- Over and Under Voltage Protection
- Voltage and Amperage LCD Status Display
- Simple Installation
- Low Standby Power Consumption
- Energy Efficient



Enclosure & Dimensions

Enclosure Type	NEMA 1 (or NEMA 3R)
Dimensions (H x W x D)	20-13/16" x 15-3/16" x 7-1/16"
Weight	31 lbs

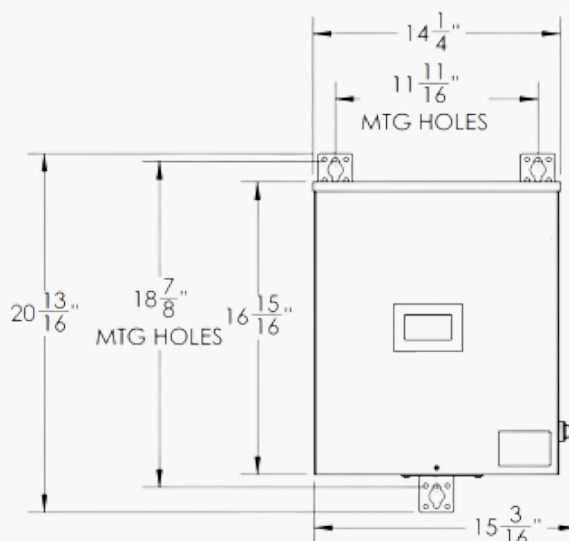

To request a quote, please call or email NAPCco:

877-545-2926

info@napces.com

www.NorthAmericaPhaseConverters.com

