

TritonPro Maxx 240 Digital Phase Converter

75 HP | 240 Amps



TPX-240 Quick Specs

Horsepower: 75 HP

Max Input Amperage: 416 A

Max Output Amperage: 240 A

Primary Volts: 187 – 260 Volts

Secondary Volts: Same as input +/-2%

NAPCco Part #: TPX-240



Technical Specifications


Specification	Details
Primary Voltage	187—260V
Secondary Voltage	Same as input +/- 2%
Frequency	60Hz
Operating Temp Range	-10°C (14°F) to 50°C (122°F)
Efficiency	98.7%
Standby Power	300 W
Output Power	99.7 kVA
General Purpose	Single-Phase to 3-Phase
Certifications	ETL-Listed
Terminations	Terminal Blocks

Enclosure & Dimensions

Enclosure Type	NEMA 1 (or NEMA 3R)
Dimensions (H x W x D)	44 15/16" x 25 13/16" x 19"
Weight	288 lbs

TPX Features

- Advanced Solid-State Switching Technology
- Voltage Balancing within 2%
- Over and Under Voltage Protection
- Voltage and Amperage Status Display
- Simple Installation
- Low Standby Power Consumption
- Energy Efficient

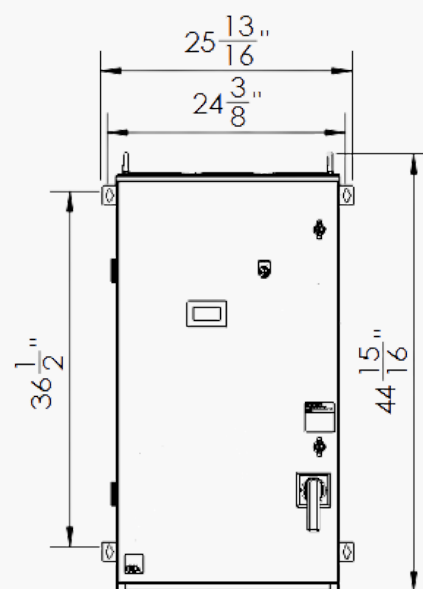

To request a quote, please call or email NAPCco:

☎ 877-545-2926

📧 info@napces.com

www.NorthAmericaPhaseConverters.com

